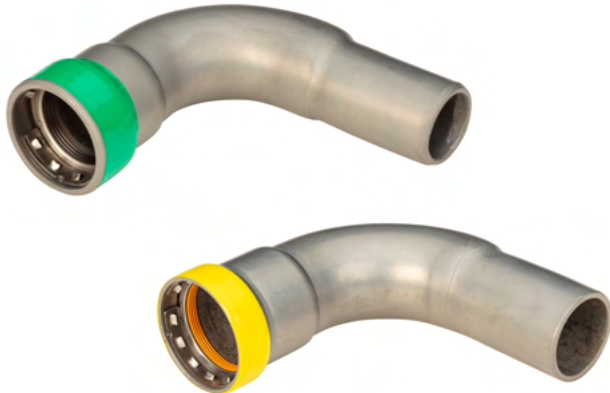


90° Street Elbow
FTG x Press

Job Name
Job Location
P.O.#
Engineer
Contractor
Wholesaler
Merit Associate

CarbonPress® 90° Street Elbow FTG x Press is available in sizes 1/2" - 2" with an EPDM or HNBR sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®)** - facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP)** - in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring Deforms and Grips Outside Diameter of Pipe.**
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:

EPDM working pressure range from full vacuum to 250 psi (17.2 bar) for water. Working pressure range from full vacuum to 125 psi (8.6 bar) for gas.

CarbonPress® Certifications

IAPMO Z 1117 (EPDM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

CarbonPress® Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

90° Street Elbow
FTG x Press

Item Number		Nominal Size 1	A (in)	L (in)	L1 (in)
EPDM	HNBR				
MB90495	MB90496	½"	1.56	2.58	2.87
MB90500	MB90501	¾"	1.83	3.01	3.27
MB90505	MB90506	1"	2.20	3.56	3.86
MB90510	MB90511	1¼"	2.66	4.47	4.61
MB90515	MB90516	1½"	2.93	4.76	5.12
MB90520	MB90521	2"	3.66	5.59	6.08

