

CopperPress™ Submittal

By Merit Brass Co.



XL Press Bushing Reducer




Job Name	
Job Location	
P.O.#	
Engineer	
Contractor	
Wholesaler	
Merit Associate	

CopperPress™ XL Press Bushing Reducer is available in sizes 2-1/2" - 4" and is made of lead-free* dezincification resistant copper with an EPDM or HNBR o-ring. **CopperPress™** fittings are designed to be used with ASTM B88 Type K, L, and M copper tubing in the hard-drawn condition.

- **Visually Indicates Pressed Ring (VIPR)** - facilitates immediate identification of un-pressed connections
- **Leak Before Press (LBP)** - in addition to the VIPR, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed; 1/2" has a 3 path LBP system and 3/4" & up have a 4 path LBP system
- **Permanent Application Marking** - imprinted on fitting body for quick H₂O or gas application identification
- **Lead-Free* Construction** - fully compliant with current lead-free* laws
- **Copper Ends** - protect against dezincification and stress corrosion cracking

Operational Parameters: Operating/Test Pressure = 300 PSI/600 PSI, Temperature Range 0°F - 250°F

Approvals: NSF ANSI/CAN 61, UPC, cUPC, IPC, IAPMO PS-117, ICC-ES-PMG, ASME B16.51

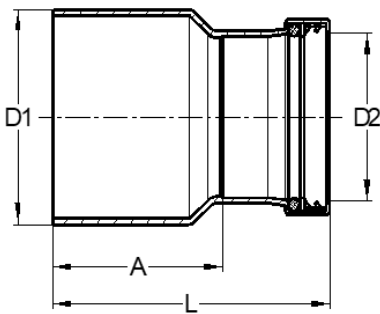

Part Number	D1 (in)	D2 (in)	L (in)	A (in)
MB22400	2-1/2	1	4.25	3.31
MB22410	2-1/2	1-1/4	4.06	2.91
MB22420	2-1/2	1-1/2	4.29	2.83
MB22430	2-1/2	2	4.25	2.64
MB22440	3	1-1/4	4.53	3.39
MB22450	3	1-1/2	4.92	3.46
MB22460	3	2	4.80	3.19
MB22470	3	2-1/2	4.53	2.80
MB22480	4	2	6.18	4.57
MB22490	4	2-1/2	5.79	4.06
MB22500	4	3	5.71	3.70

Find us in
MasterSpec®
Powered by Deltek Specpoint®

Merit Brass Company reserves the right to change any portion of the information shown on this sheet without obligation to change our press fitting line, CopperPress™, by Merit Brass Co. previously or subsequently sold. Visit www.meritbrass.com/pressfig for the most current information. Every precaution has been taken in preparing this sheet. Merit Brass Company cannot be held responsible for omissions or typographical errors. *Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified <=0.25 weighted average % lead.