


# MERIT VALVES




DIRECTING THE FLOW OF *Quality*

PRODUCT OVERVIEW  
*STAINLESS STEEL VALVES*

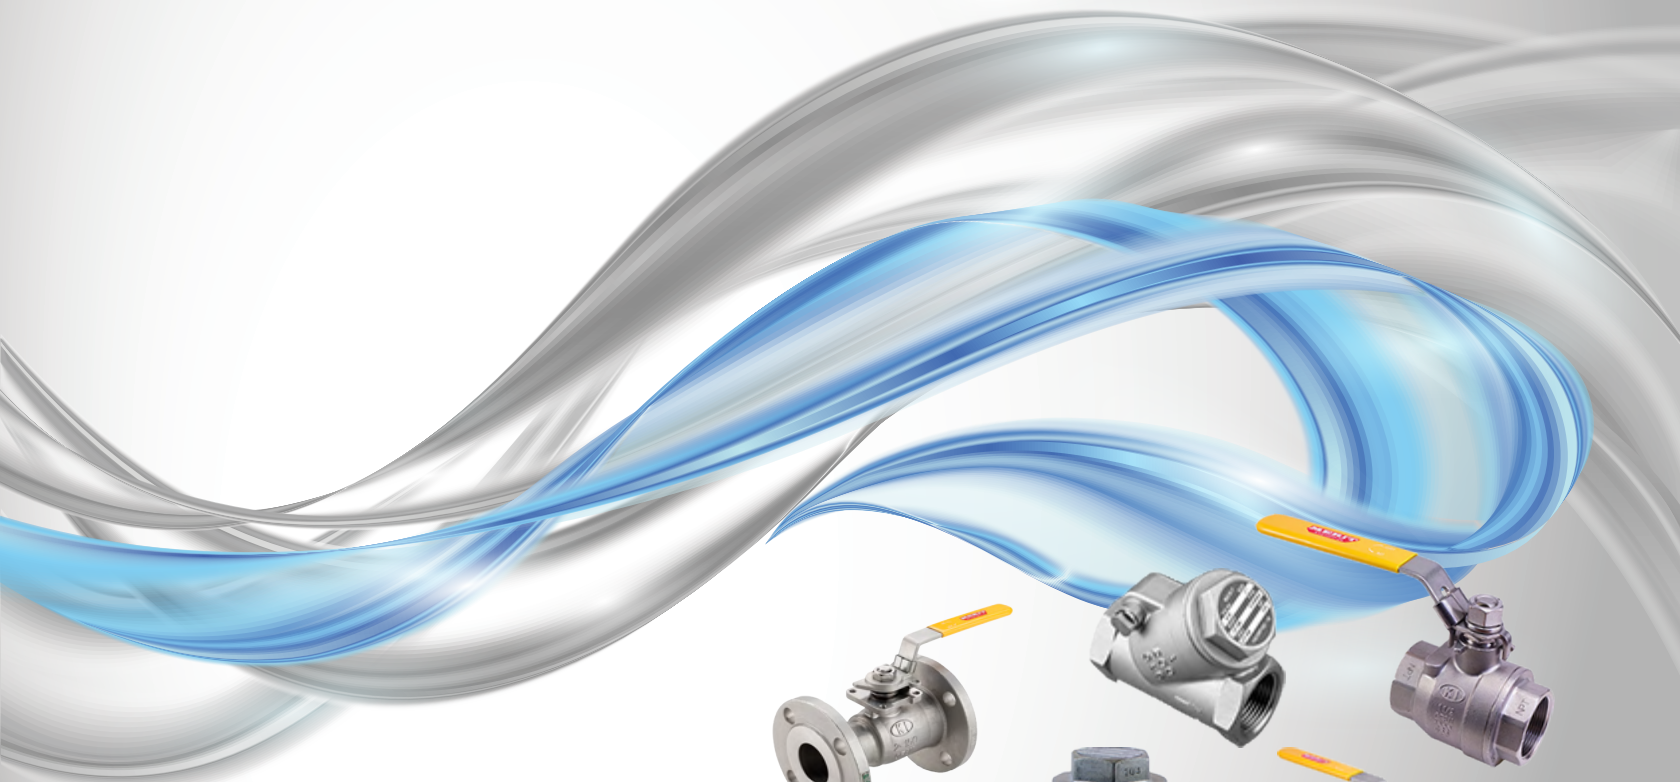

DIRECTING  
the FLOW  
of

*Quality*

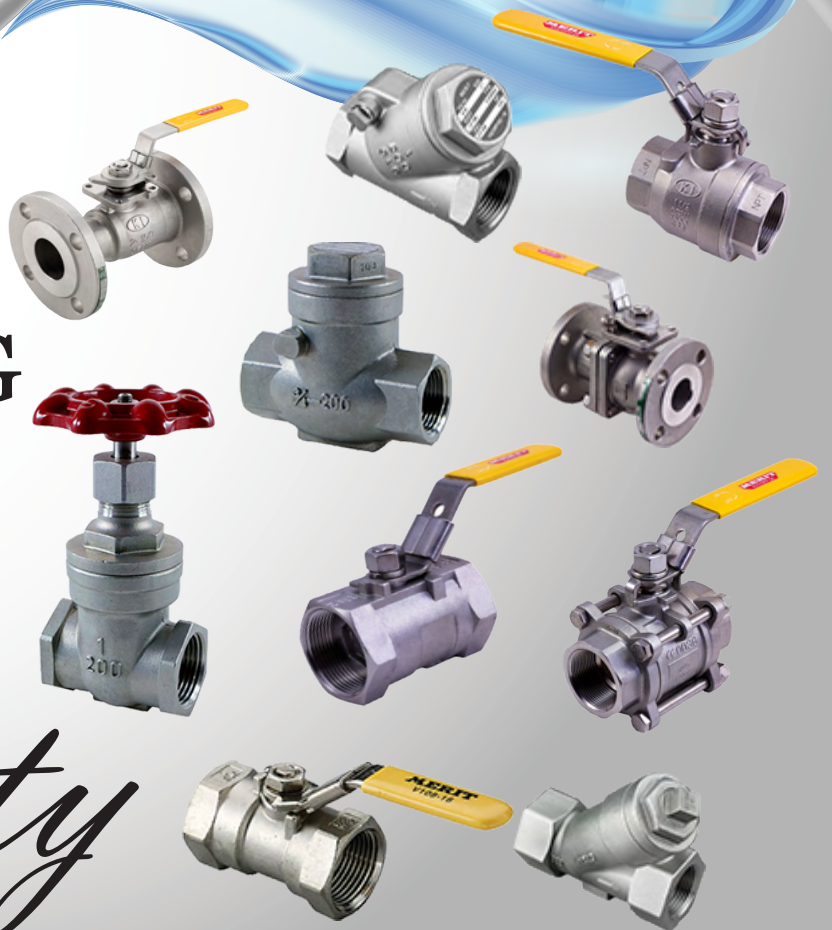

# "K" SERIES

## *One* PIECE 150# BRACKET MOUNT FLANGED END BALL VALVE

- Size Range: 1/2" - 4"
- Pressure Rating: 150#
- CF8M Material
- Design Features: Mounting Pad; TFM1600 Ball Seat
- Port: Reduced
- End Type: Flanged



## *One* PIECE BALL VALVE

- Size Range: 1/4" - 2"
- Pressure Rating: 1000 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- Port: Double Reduced
- End Type: Threaded



## *Two* PIECE 150# & 300# DIRECT MOUNT FLANGED END BALL VALVE

- Size Range: 1/2" - 6"
- Pressure Rating: 150# & 300#
- CF8M Material
- Design Features: Mounting Pad; TFM1600 Ball Seat
- Port: Full
- End Type: Flanged



## *Two* PIECE 150# BRACKET MOUNT FLANGED END BALL VALVE

- Size Range: 1-1/2" - 6"
- Pressure Rating: 150#
- CF8M Material
- Design Features: Mounting Pad; TFM1600 Ball Seat
- Port: Full
- End Type: Flanged



## *Two* PIECE BALL VALVE

- Size Range: 1/4" - 3"
- Pressure Rating: 1000 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- Port: Full
- End Type: Threaded

## *Three* PIECE BALL VALVE

- Size Range: 1/4" - 3"
- Pressure Rating: 1000 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- Port: Full
- End Type: Threaded & Socket Weld



# “V” SERIES



## *One* PIECE BALL VALVE

- Size Range: 1/4" - 2"
- Pressure Rating: 800 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- Port: Reduced
- End Type: Threaded



## *Two* PIECE BALL VALVE

- Size Range: 1/4" - 2"
- Pressure Rating: 2000/1500 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- End Type: Threaded



## *Two* PIECE BALL VALVE

- Size Range: 1/4" - 3"
- Pressure Rating: 1000 WOG
- CF8M Material
- Design Features: Blow-Out Proof Stem
- Port: Full
- End Type: Threaded



## *Three* PIECE BALL VALVE

- Size Range: 1/4" - 3"
- Pressure Rating: 1000 WOG
- CF8M Material
- Design Feature: Blow-Out Proof Stem
- Port: Full
- End Type: Threaded & Socket Weld



## *Class 200*

### SWING CHECK VALVE

- Size Range: 1/4" - 3"
- 200 PSI Working Pressure at 350°F
- CF8M Material
- End Type: Threaded



## *Class 200* SWING CHECK WYE PATTERN VALVE

- Size Range: 1/4" - 3"
- 200 PSI Working Pressure at 350°F
- CF8M Material
- End Type: Threaded



## *Class 200* GATE VALVE

- Size Range: 1/2" - 2"
- 200 PSI Working Pressure at 350°F
- CF8M Material
- Design Feature: Screwed Bonnet & Non-Rising Stem
- Port: Full
- End Type: Threaded



## *Class 600* Y-STRAINER


- Size Range: 1/4" - 3"
- 600 PSI Working Pressure at 350°F
- CF8M Material
- End Type: Threaded




As reflected in the nipples we manufacture, Merit's Stainless Steel Valve Line also continues to demonstrate Merit's commitment to high quality standards. Since 1937, Merit has sought out vendors with impeccable reputations and a strong commitment to quality.

Contact our Sales Department today for a sample of Merit Brass' Stainless Steel Valve Line!


# SHIPPING TIMES

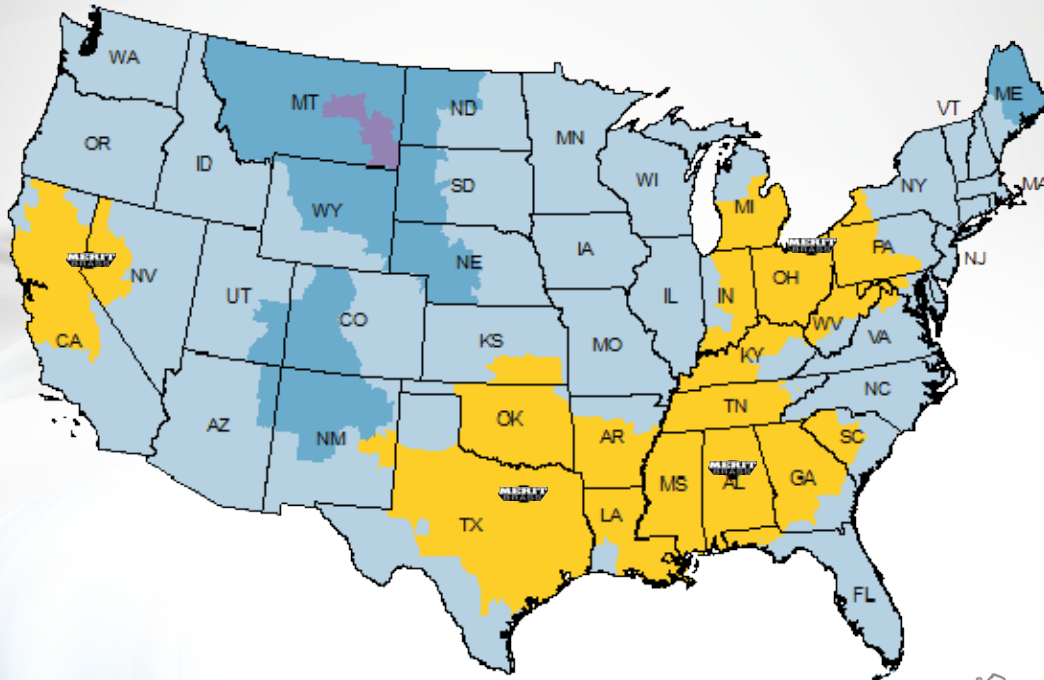


## FedEx



\*FedEx is Merit's Primary Carrier

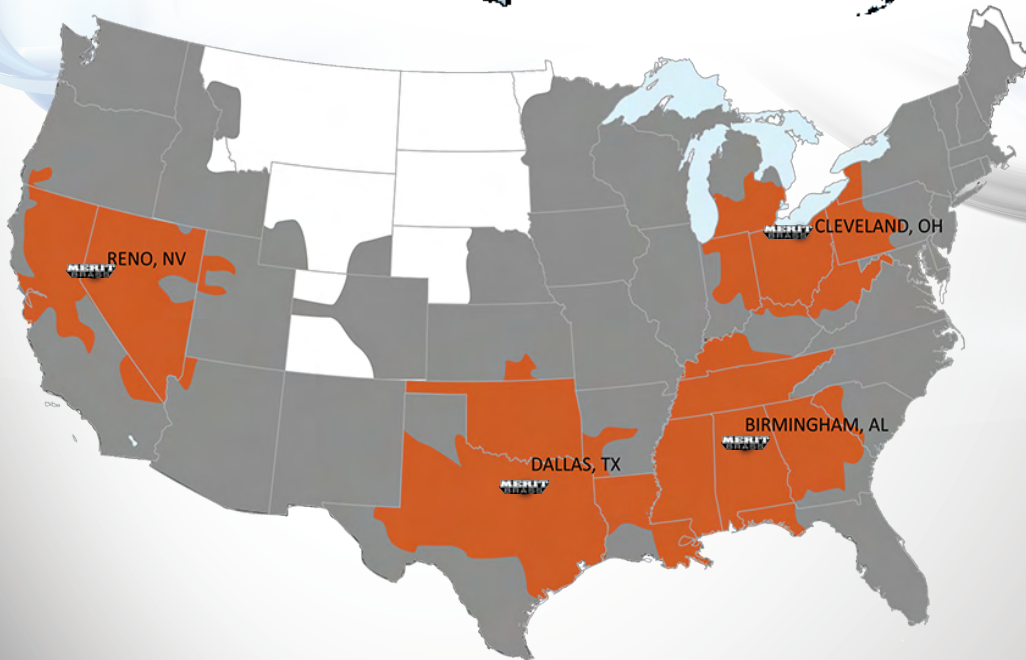

## UPS



### Cleveland Headquarters

One Merit Drive/PO Box 43127  
Cleveland, OH 44143  
800.726.9800 (t) | 800.726.9880 (f)  
sales@meritbrass.com

### Dallas Distribution Center

10614 King William Dr.  
Dallas, TX 75220  
877.259.2591 (t) | 877.259.2596 (f)  
mbsalesTX@meritbrass.com

### Sparks Distribution Center

200 Vista Blvd., Suite #106  
Sparks, NV 89434  
877.711. RENO (7366) (t) | 877.376.0093 (f)  
mbsalesNV@meritbrass.com

### Birmingham Distribution Center

220 Oxmoor Court  
Birmingham, AL 35209  
855.912.0409 (t) | 866.668.9168 (f)  
mbsalesAL@meritbrass.com

Merit Brass Headquarters Has An ISO 9001:2015 Registered Quality Management System

www.meritbrass.com • www.mbwebxpress.com

Follow Us On Social Media

